


Specify the Face-to-Face measurement when ordering.

RUBBER EXPANSION JOINTS

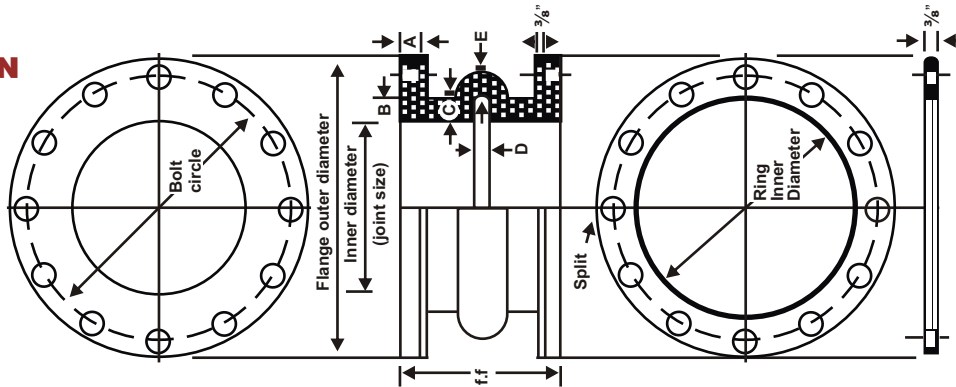

Steel retaining ring

Dimension for standard spool - type expansion joints

Joint size I. D. (in)	Recommended f.f (in)	Flange O. D. (in)	Bolt Circle diam. (in.)	Bolt holes		Ring I.D. (in)	Dimensions (in)					Max working pressure (psi)			DEFLECTION LIMITS (in)		
				Number	Diam (in)		A	B	C	D	E	Style 140	Style 150	Style 200	Com-pression	Exten-sion	Lateral
1/2	6	3 1/2	2 3/8	4	9/16	1 5/8	1/2	7/8	1	1/2	3/8	165	165	200	7/16	1/4	1/2
3/4	6	3 7/8	2 3/4	4	9/16	1 7/8	1/2	7/8	1	1/2	3/8	165	165	200	7/16	1/4	1/2
1	6	4 1/4	3 1/8	4	5/8	2 3/8	9/16	7/8	1 1/8	1/2	7/16	165	165	200	7/16	1/4	1/2
1 1/4	6	4 5/8	3 1/2	4	5/8	2 5/8	9/16	7/8	1 1/8	1/2	7/16	165	165	200	7/16	1/4	1/2
1 1/2	6	5	3 7/8	4	5/8	2 7/8	9/16	7/8	1 1/8	1/2	7/16	165	165	200	7/16	1/4	1/2
2	6	6	4 3/4	4	3/4	3 5/8	9/16	29/32	1 1/4	1/2	1/2	165	165	200	7/16	1/4	1/2
2 1/2	6	7	5 1/2	4	3/4	4 1/8	9/16	29/32	1 1/4	1/2	1/2	165	165	200	7/16	1/4	1/2
3	6	7 1/2	6	4	3/4	4 5/8	9/16	29/32	1 1/4	1/2	1/2	165	165	200	7/16	1/4	1/2
4	6	9	7 1/2	8	3/4	5 7/8	9/16	7/8	1 1/4	1/2	1/2	165	165	200	7/16	1/4	1/2
5	6	10	8 1/2	8	7/8	6 1/8	9/16	7/8	1 1/4	1/2	1/2	140	140	200	7/16	1/4	1/2
6	6	11	9 1/2	8	7/8	7 1/8	5/8	1	1 1/4	1/2	1/2	140	140	200	7/16	1/4	1/2
8	6	13 1/2	11 3/4	8	7/8	9 7/8	3/4	1	1 1/4	3/4	5/8	140	100	190	7/16	1/4	1/2
10	8	16	14 1/4	12	1	12 1/8	3/4	1 5/32	1 1/4	3/4	11/16	140	100	190	7/16	1/4	1/2
12	8	19	17	12	1	14 1/8	3/4	1 5/32	1 1/4	3/4	11/16	140	100	190	11/16	3/8	1/2
14	8	21	18 3/4	12	1 1/8	16 1/2	7/8	1 5/32	2	3/4	3/4	85	85	130	11/16	3/8	1/2
16	8	23 1/2	21 1/4	16	1 1/8	18 1/2	7/8	1 5/32	2	3/4	3/4	65	65	110	11/16	3/8	1/2
18	8	25	22 3/4	16	1 1/4	20 1/2	7/8	1 5/32	2	3/4	3/4	65	65	110	11/16	3/8	1/2
20	8	27 1/2	25	20	1 1/4	22 5/8	1	1 5/32	2	7/8	25/32	65	65	110	11/16	3/8	1/2
22	10	29 1/2	27 1/4	20	1 3/8	24 5/8	1	1 5/32	2	7/8	25/32	65	65	100	13/16	7/16	1/2
24	10	32	29 1/2	20	1 3/8	26 5/8	1	1 5/32	2	7/8	25/32	65	65	100	13/16	7/16	1/2
26	10	34 1/4	31 3/4	24	1 3/8	27 7/8	1	1 3/16	2 1/4	1	13/16	55	55	90	15/16	1/2	1/2
28	10	36 1/2	34	28	1 3/8	30 7/8	1	1 3/16	2 1/4	1	13/16	55	55	90	15/16	1/2	1/2
30	10	38 3/4	36	28	1 3/8	32 7/8	1	1 3/16	2 1/4	1	13/16	55	55	90	15/16	1/2	1/2
34	10	43 3/4	40 1/2	32	1 3/8	37	1	1 3/16	2 1/4	1	13/16	55	55	90	15/16	1/2	1/2
36	10	46	42 3/4	32	1 5/8	39	1	1 5/16	2 1/4	1	13/16	55	55	90	15/16	1/2	1/2
40	10	50 3/4	47 1/4	36	1 3/4	43	1	1 3/16	2 1/4	1	13/16	55	55	90	15/16	1/2	1/2
42	12	53	49 1/2	36	1 5/8	45 1/4	1 3/16	1 1/4	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
44	12	55 1/4	51 3/4	40	1 3/4	47 1/4	1 3/16	1 1/4	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
48	12	59 1/2	56	44	1 5/8	51 1/4	1 3/16	1 1/4	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
50	12	61 3/4	58 1/4	44	1 7/8	53 1/4	1 3/16	1 3/8	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
54	12	66 1/4	62 3/4	44	2	57 1/4	1 3/16	1 3/8	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
56	12	68 3/4	65	48	2	59 1/4	1 3/16	1 3/8	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
60	12	73	69 1/4	52	2	63 1/4	1 3/16	1 3/8	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
62	12	75 3/4	71 3/4	52	2	65 1/4	1 3/16	1 3/8	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
66	12	80	76	52	2	69 1/4	1 3/16	1 3/8	2 1/2	1 1/8	29/32	55	55	80	15/16	1/2	1/2
72	12	86 1/2	82 1/2	60	2	75 1/4	1 3/16	1 3/8	2 1/2	1 1/8	29/32	45	45	70	15/16	1/2	1/2
78	12	93	88 3/4	60	2 1/8	81 1/4	1 3/16	1 3/8	2 1/2	1 1/8	29/32	45	45	70	15/16	1/2	1/2



Kiran Rubber Industries Pvt. Ltd.

135, Shiv-Krupa Industrial Estate, LBS Road, Opp. Raj Legacy, Vikhroli (W), Mumbai - 400 083.
 Tel. : +91 (0) 22 4263-7400 • Fax : +91 (0) 22 4263-7499 • E-mail : info@kiranrubber.com • Website : www.kiranrubber.com